





MAGELAN BLIND CONTROL

Data sheet

Brief description:

The blind module can be installed in the flush-mounted box or in the blind box. Allows individual control of the blinds. In conjunction with Gateway GT-100.

Magelan Blind Control

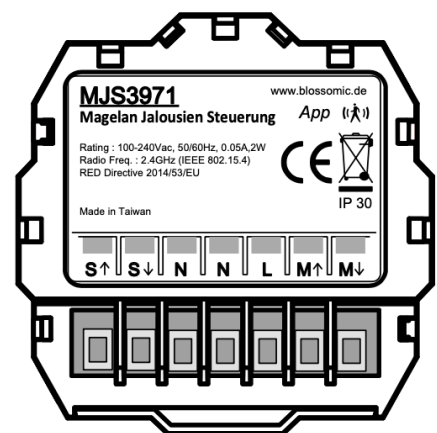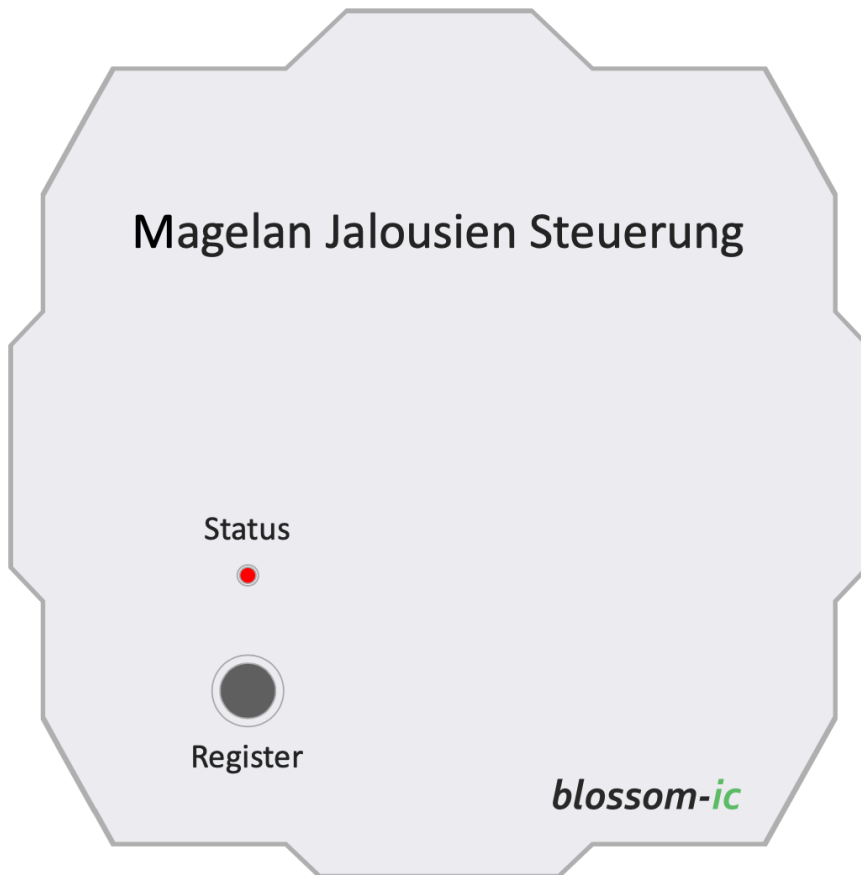

Item number: MJS-3971

Properties

- To control the blinds via app (also possible from a distance).
- Possibility of connecting different engine types.
- Personalized schedules for controlling the blinds.
- Repeater for the blossom-ic system.
- In connection with the gateway GT-100.

Scope of application

Magelan Blind Control

Blind control can be installed in the flush-mounted box or in the blind box. Allows individual control of the blinds. In conjunction with Gateway GT-100.

Gateway GT-100

To control blossom-ic products via the Internet, simply and conveniently using the blossomic app. The blossomic app is available for all smartphones and tablets with iOS and Android.

Radio Frequency Communication

- blossom-ic RF: 2.4GHz, ISM Band, 16 channels
- Range: up to 50 m in buildings

Technical data

Technical data - Magelan Blind Control

• Ambient temperature	0 ~ 50°C
• Mains voltage	230V AC / 50/60Hz
• Dimension	L54 x B54 x T32 (mm)
• Wireless frequency	2.4GHz, ISM Band, 16 channels
• Protection class	IP 30
• RF-Test	RED 2014/53/EU
• CE	Available
• RoHs	Available
• Type of antenna	PCB antenna

blossom-ic



intelligent controls

blossom-ic GmbH & Co. KG

Oberer Buxheimer Weg 60, 87700 Memmingen, Germany

P: +49 8331-756 965 80 **E:** info@blossomic.de

W: www.blossomic.de